


# Helical Masonry Repairs – Emergency Stabilisation of Gable Wall Bleesby House Farm, North Lincolnshire

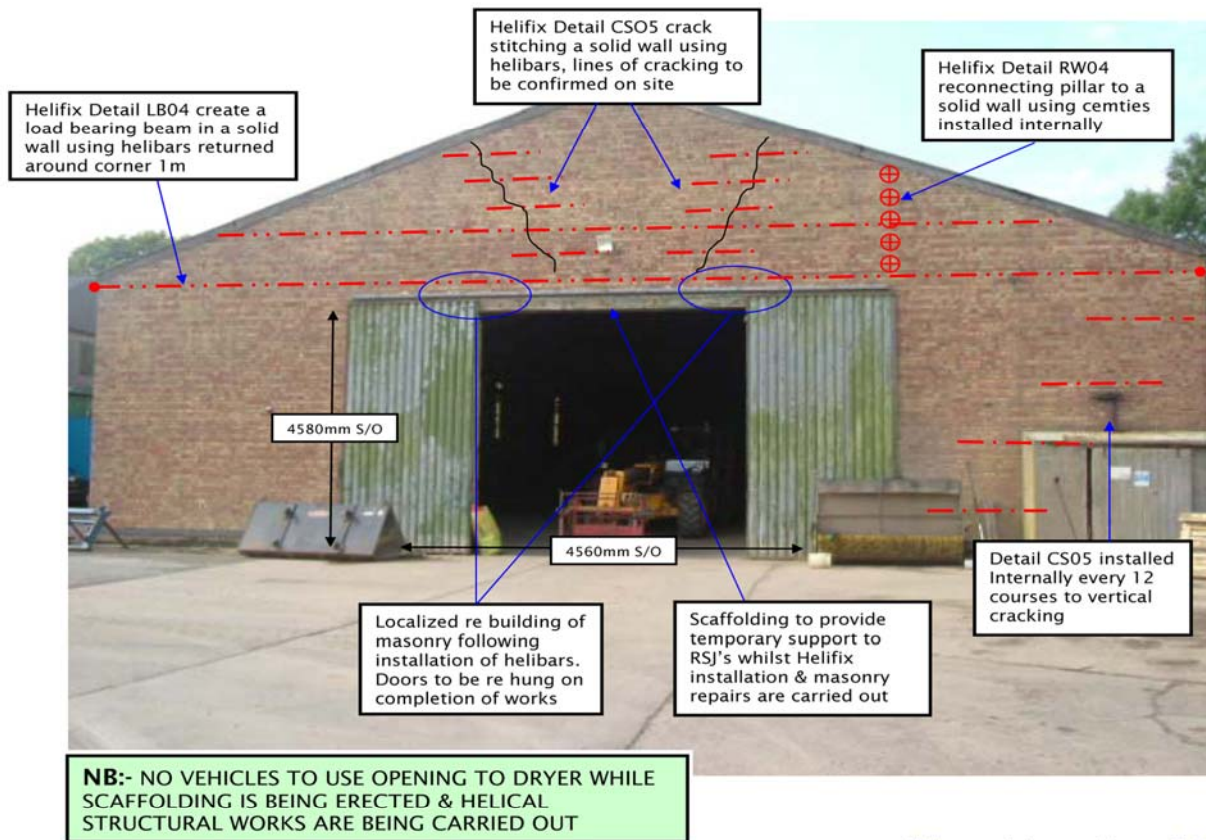

**Client:** NFU Insurance  
**Consultant:** Howard Ward Structural Engineers  
**Value:** £4,500  
**Project Duration:** 2 Days  
**Completion Date:** 2008

*"The quick reaction of Gelder Group and the suggestion to use the helical masonry repair system on this project was a matter of sheer brilliance"*

Darren Thorpe  
Associate Director  
Howard Ward Associates

During the middle of harvest a tractor drove out of the dryer building with its trailer raised, severely damaging the gable wall of the building and making it unsafe. The consequential losses for the farms insurer was huge as the building became unusable.

The gable clearly needed re-building but a temporary repair using our Helical masonry restraint system made the gable safe. Harvest proceeded, albeit with a 48 hour delay and the gable was re-built the following springtime whilst the building was not in use.